


## SCHEUERLE | EuroCompact U9

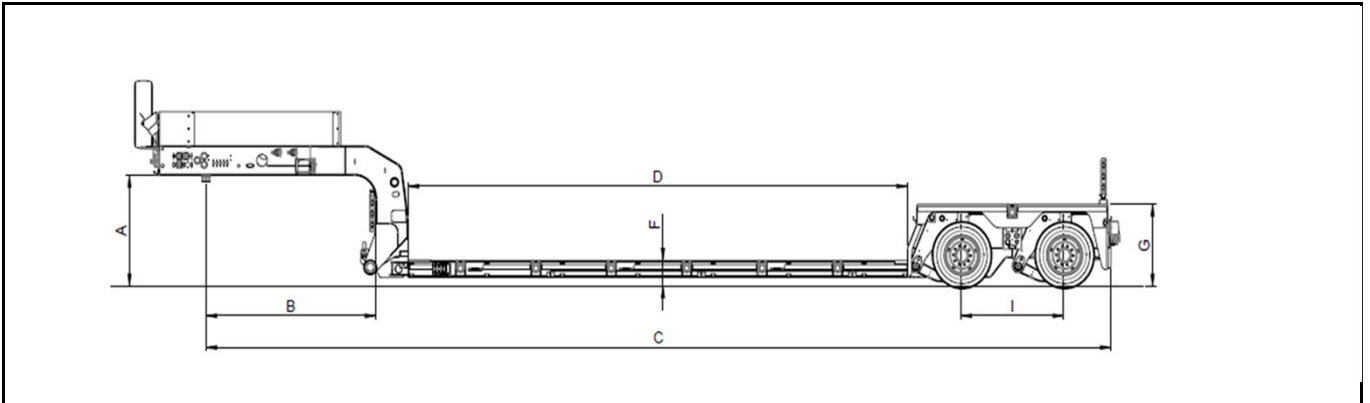

### Dimensions

A	5th. wheel height	[mm]	1.350
B	Swing clearance	[mm]	2.250
C	Trailer length (King Pin to rear-end)	[mm]	11.900
D	Loading length	[mm]	6620 + 5650 = 12270
E1	Width of the main beam	[mm]	2540
E2	Total loading width	[mm]	2.540 - 3.000*
E3	Min. width (lower loading level, approx.)	[mm]	-
F	Loading height (at ground clearance of 100mm)	[mm]	300
F1	Deck height	[mm]	200
F2	Ground clearance	[mm]	100
F3	Outrigger height approx.	[mm]	-
G	Minimum platform height, loaden	[mm]	860
H	Compensation stroke	[mm]	650
I	Axle distance	[mm]	1.360
	Number of axle lines	[pcs.]	2
	Tires	[mm]	8 St. 245/70 R17,5

### Speed and weight

Maximum speed up to	[km/h]	80 <sup>(1)</sup>	80	80 (ECE-R13)	10
Permissible axle load	[kg]	12.000	12.000	12.000	14.000
Permissible 5th wheel load	[kg]	21.000	25.000	25.000	25.000
Permissible payload	[kg]	32.300	36.300	36.300	40.300
Permissible gross weight	[kg]	45.000	49.000	49.000	53.000
Dead weight	[kg]	12.700 (+/-4%)**			

### General information

Type of steering system		hydro-mechanical
Max. steering angle	[°]	± 55°
Ambient temperature	[°C]	-20 / +45

\*with optional widening system

\*\*without options

\*\*\* Axle-/ fifth wheel load like with SmartAxle

We reserve the right for technical modification / Illustration may contain options

(1) Customer specific selection

1/1